

F	LOOR LEVELLING & REPAIR	
	WATERPROOFING	
	TILE ADHESIVES	
	FLOOR ADHESIVES	
GROU	T <mark>S, SILICONE AND SEALERS</mark>	
	CONSTRUCTION	
	RENDERS	
	TOOLS	
	NOTES	

PRODUCT CATALOGUE



The DUNLOP TRADE website makes your project easy with everything you need:

- Tile Adhesive Selector
- Product Calculators
- Project How-Tos
- Grout Colour Selector
- Datasheets and Technical Data

Ø

From the leading manufacturer of tiling, flooring and waterproofing products, the DUNLOP TRADE range provides complete product solutions for all types of projects.

From surface preparation through to tiling, grouting, floor levelling, waterproofing, repairs and rendering, your project will look better for longer when using DUNLOP TRADE products.







Tile Adhesive DIY Project Grout Colour Product Selector Centre

Products Selector Calculators







dunloptrade.com.au **TECHNICAL SUPPORT** 1800 222 841 (AU) 0800 224 070 (NZ)

ARDEX Australia Pty Ltd.

ABN 82 000 550 005 2 Buda Way Kemps Creek, NSW 2178 Ph: 1300 788 780

ARDEX New Zealand 15 Alfred Street Onehunga, Auckland 1061 Ph: (03) 373 6900

The DUNLOP TRADE range has been tailored to provide trade quality products for professional results. Your project is made easy with step by step instructions and easy to choose and use products.

CONTENTS

Floor Levelling & Repair	2
Waterproofing	6
Tile Adhesives	10
Floor Adhesives	17
Grouts, Silicone and Sealers	20
Construction	24
Renders	27
Tools	30
Notes	34



DUNLOF

FLOOR LEVELLER

0== 0== 0==

- @=== 0

A DINITOR

FLOOR LEVELLER

ARDIT CEMENTITOUS

20KG

15KG

FLOOR REPAIRER RAPID PATCH

DUNLOP FLOOR REPAIRER RAPID PATCH is a fast setting patching mortar that can be used on cracks and holes to any depth prior to laying tiles, vinyl or carpet floor coverings. It is ready to walk on in just 45 minutes and ready for floor coverings after 1 hour.

BED THICKNESS

Repair cracks and holes of up to 20mm

FUNCTIONS

Concrete, renders (walls), screeds, masonry, timber, compressed fibre cement and Magnesium Oxide floor boards I OCATION

LOCATION		
ndoor and outdoor		
COVERAGE		
m ² at 1mm thicknow		

3m² at 1mm thickness per 5kg or 1m² at 3mm thickness per 5kg

MULTIPURPOSE FLOOR LEVELLER

DUNLOP MULTIPURPOSE FLOOR LEVELLER is a cement-based compound, that when mixed with water provides a smooth, pourable, free-flowing material designed for smoothing uneven concrete before applying floor coverings such as carpet and ceramic tiles. It can be walked on in 2 hours and tiled over in 4 hours. DUNLOP MULTIPURPOSE FLOOR LEVELLER is also suitable for ramping and bulk fill.

SUBSTRATES

Concrete LOCATION Indoor & outdoor COVERAGE 9m² at 1mm thickness per 15kg bag or 3m² at 3mm thickness per 15kg bag

BED THICH Up to 25mn	KNESS m in one application		
SURFACES Floors			
Size	Barcode	Barcode Item Code	
5kg	9315021021318	10309	
15kg	9315021021325	10308	

ARDIT FLOOR LEVELLER

THE ULTIMATE IN ARDIT FLOOR LEVELLING TECHNOLOGY IS BACK. For over 50 years, ARDIT technology has been at the forefront of floor levelling solutions. Renowned in the trade for its outstanding performance, DUNLOP ARDIT FLOOR LEVELLER is a high quality cement-based levelling compound with superior gualities of flow and workability.

SUBSTRATES Concrete

LOCATION Indoor and outdoor use under covered areas

COVERAGE 4m² at 3mm thickness per 20kg

12m² at 1mm thickness per 20kg LEVEL THICKNESS


1 – 25mm without aggregate Bulkfill to 50mm with aggregate

WALKABILITY	
3 hours	

FLOOR COVERINGS Ready for tiles in 3 hours Vinyl and carpet in 24 hours MIXING

4.5L water per 20kg bag

Size	Barcode	Item Code
20kg	9315021022179	11323





ARDIT RAPIDSET REPAIR MORTAR

LOCATION Indoor and outdoor THICKNESS Up to 20mm WORKING TIME 15 minutes COVERAGE

DUNLOP LEVEL-FLEX TIMBER FLOOR LEVELLER is a partially self-smoothing latex floor leveller with excellent properties of adhesion, flexibility and water resistance for use prior to the installation of ceramic tiles, carpet, floorings floors and vinyl floor coverings. It is easy to mix and produces a smooth, flat surface. The new and improved formulation boasts no odour and excellent flow.

SURSTRATES Timber and concrete LOCATION Indoor

COVERAGE Approximately 7m² per 14.9kg unit (12kg powder, 2.9L liquid) at 1mm bed thickness or 2.3m² at 3mm bed thickness

ARDIT TIMBER FLOOR LEVELLER

DUNLOP ARDIT TIMBER FLOOR LEVELLER is an advanced fibre reinforced smoothing and levelling compound for internal use. It incorporates MICROTEC technology that is designed to rapidly smooth and level new and existing substrates prior to applying the finished floor covering such as ceramic tiles, carpet, floating floor boards or vinyl flooring.

SUBSTRATES Timber and concrete LOCATION Indoor COVERAGE

Approximately 1.4kg of DUNLOP ARDIT TIMBER FLOOR LEVELLER powder/m²/mm, e.g. one bag will cover approximately 3m² at 3mm thickness.













ARDIT RAPIDSET REPAIR MORTAR is an extremely rapid hardening construction mortar which is trafficable after just 45 minutes and ready for floor coverings after 1 hour.

Concrete, render, screeds, masonry, plasterboard, timber, fibre-cement sheet

3m² at 1mm thickness per 5kg bag 1m² at 3mm thickness per 5kg bag

WALKABILITY 45 minutes

FLOOR COVERINGS Ready for floor coverings after 1 hour

Size	Barcode	Item Code
5kg	9315021022339	13519
10kg	9315021121391	40770

LEVEL-FLEX TIMBER FLOOR LEVELLER

KIT CONTAINS

• 11 Primer

• Level-Flex Timber Floor Leveller (12kg powder, 2.9L liquid)

Size	Barcode	Item Code
15.9kg Kit	9315021023404	24885

KIT CONTAINS

- 1L Primer
- Ardit Timber Floor Leveller (15kg powder)

ſ	Size	Barcode	Item Code
	16kg Kit	9315021121650	44774



ARDIT FEATHER FINISH

DUNLOP ARDIT FEATHER FINISH is a cement based smoothing compound designed to provide a smooth finish to a variety of internal substrates prior to the installation of floor coverings such as vinyl, carpet and ceramic tiles.

THICKNESS

SUBSTRATES

LOCATION Indoor COVERAGE

Concrete, tiles, sheet timber (plywood & particleboard) and DUNLOP FLOOR LEVELLER

Skim coat 12m² over concrete and

Skim coat 28m² over concrete and 56m² over sheet timber per 8kg

	Feather edge to 3mm	
SURFA Floors	CES	
Size	Barcode	Item Code
3.5kg	9315021023411	24881

ARDIT **CRACK FILLER**

High Strength Hybrid Polyurethane that repairs spalls and cracks in concrete instantly. ARDIT CRACK FILLER has a viscosity similar to water, yet sets stronger than concrete in 1 hour. Large cracks and spalls can be subjected to vehicular traffic after just 20 minutes.

(~)

SURFACES Concrete		
LOCATION Indoor and outdoor		
Item	Barcode	Item Code
254ml	9315021022643	19924

STRONGER THAN CONCRETE CRACK FILLER AND

 $\langle \cdot \rangle$ SPALL REPAIR SETS FAST IN 20 MINUTES

SELF MIXING 2-PART PU


BUILDER'S BOND

High strength multipurpose, rapid cure epoxy bonding and repair system. DUNLOP BUILDER'S BOND will bond together almost any material such as concrete, brick, block and wood and its specially formulated non-sag property is perfect for overhead, wall and floor repairs.

LOCATION Indoor and outdoor

	Item	Barcode	Item Code
	254ml	9315021022636	19923

SETS STRONGER THAN \checkmark **CONCRETE IN 2 HOURS HIGH STRENGTH 2-PART EPOXY** $\langle \rangle$ WITH SELF-MIXING NOZZLES CAN BE SHAPED, SANDED, PAINTED AND DRILLED

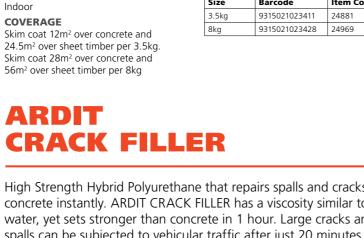



FLOOR LEVELLING / REPAIR

5





PRIMER & ADDITIVE

DUNLOP PRIMER & ADDITIVE is a ready to use primer for enhancing the adhesion between surfaces and DUNLOP TILE ADHESIVES, FLOOR PREPARATION and WATERPROOFING products. As an additive to grout, it enhances the colour of the grout, increases adhesion, resists abrasion and stains and imparts a degree of flexibility.

SUBSTRATES

Indoor and outdoor

SURFACES

Walls and floors

Concrete, renders & screeds, plasterboard and fibre-cement sheets LOCATION

COVER	AGE	
Approxin	nately 10m ² per litre	
. .		••

Size	Barcode	Item Code
1L	9315021021233	10347
4L	9315021021240	10348



DUNLOP UNDERTILE WATERPROOFING is an effective and simple to use waterproofing membrane specially designed to waterproof under tiles. It can be applied with a normal brush or roller. It is tough, flexible and fully compatible with DUNLOP TILE ADHESIVES AND GROUTS. With advanced acrylic polymers, it is safe to use, low in odour and approved to Australian Standards by an independent authority (BRANZ).

SUBSTRATES bricks, AAC blocks LOCATION Indoor, outdoor, wet areas, balconies

For use with DUNI OP UNDERTILE WATERPROOFING MEMBRANE this mat reinforces corners, joints and cracks. DUNLOP WATERPROOFING REINFORCING MAT is an integral part of the DUNLOP waterproofing system.

FUNCTIONS membrane coverage

LOCATION Indoor and outdoor COVERAGE Up to 6m² per 4L,

PRIMER

DINTAT

OND COAT

MULTIPURPOSE PRIMER

DUNLOP MULTIPURPOSE PRIMER is a water-based primer which enhances the bond between substrates and DUNLOP FLOOR LEVELLERS, RENDERS, TILE ADHESIVES and WATERPROOFING products. Suitable substrates include new and old concrete and compressed fibre-cement sheets. DUNLOP MULTIPURPOSE PRIMER is suitable for indoor and outdoor projects over walls and floors.

Size

Barcode

9315021114447

9315021023534

Item Code

13538

30138

SUBSTRATES

Fibre-cement sheets, concrete, renders and screeds, masonry and lightweight concrete blocks LOCATION

Indoor and outdoor

COVERAGE Approximately 6m² per litre

RAPID BOND COAT

DUNLOP BOND COAT is a water-based bonding coat that provides a chemical key to increase adhesion on smooth, dense, difficult non-porous substrates prior to the application of DUNLOP adhesives, floor levelling compounds and DUNLOP waterproofing membranes (in non-fully immersed situations).

SUBSTRATES

Internal sheet timber (particleboard/ plywood), medium density fibre-cement sheet, compressed fibre-cement sheet, jointing compound over plasterboard, Scyon[™], concrete, renders, screeds, masonry and lightweight concrete blocks, autoclaved aerated concrete (AAC), existing glazed tiles (not suitable for shower floors, permanently immersed condition or steel trowelled finish concrete)

COVERAGE Approximately 10m² per litre LOCATION Indoor and outdoor

Size	Barcode	Item Code
1L	9315021023701	32373





UNDERTILE WATERPROOFING

Wet area grade plasterboard, fibre cement, marine plywood, concrete, sand/cement renders and screeds,

COVERAGE

20kg/5kg will waterproof up to 17m² /4.25m² on walls and 8.5m²/2.1m² on floors

Size	Barcode	Item Code
12.5kg	9315021121414	41069



Reinforcing waterproofing membrane in critical areas; helping to ensure proper membrane thickness; and enabling immediate application of a second waterproofing coat. Also acts as a carrier for difficult to get at areas and smooths rough joints to ensure good

SURFACES

Wall/floor junctions, wall/wall junctions, cracks, sheet joints, over metal/PVC angles, at 90° edges – external edge of balcony, over shower hob and hob/ floor joint.

Size	Barcode	Item Code
100mm x 50m	9315021023787	37071



DUNLOP DAMP-PROOF is an acrylic brush-on membrane that will prevent rising damp, efflorescence and will resist negative hydrostatic pressure. It can be applied to damp surfaces and freshly laid hardened (green) concrete and can be overcoated using almost any decorative paint.

depending on application

Size	Barcode	Item Code
4L	9315021022391	13592



EXPRESS WET AREA TAPE

DUNLOP EXPRESS WET AREA TAPE is a self-adhesive sealing tape that provides a waterproofing seal between the surface joints of the floor and wall, under shower grates and outlets in wet areas such as bathrooms, kitchens and laundries. Use in conjunction with DUNLOP EXPRESS WET AREA WATERPROOFING MEMBRANE for a rapid, total express waterproofing system and tiling can commence after 4 hours.

COVERAGE

Up to 10m. A standard shower recess of 1.8m height will require approximately 7m of tape. Overlapping of tape to be a minimum of 15mm

Size	Barcode	Item Code
80mm x 10m	9315021023053	23648

EXPRESS WET AREA WATERPROOFING

DUNLOP EXPRESS WET AREA WATERPROOFING is a high performance, water-based acrylic polyurethane membrane. It offers superior workability with high build capabilities to easily achieve the required thickness of an effective waterproof membrane. When used with the DUNLOP EXPRESS WET AREA TAPE tiling can be achieved after 4 hours.

SUBSTRATES

Internal fibre-cement wall sheet, compressed fibre-cement sheet, wet area grade plasterboard, concrete, internal structural plywood (PAA branded) including marine or wet area grade only (the shower area must be sheeted using ceramic tile underlay), renders and screeds (cured for min. 7 days) and internal AAC blocks and panels

LO	CAT	ION

Indoor, outdoor, wet areas, balconies COVERAGE

20kg/5kg will waterproof up to 17m² /4.25m² on walls and 8.5m²/2.1m² on floors

Size Barcode		Item Code
1kg	9315021120998	39504
5kg	9315021023091	23715
20kg	9315021022483	16551

PRO RAPID SUPARIA CO RAPO STYL

T AREA

PRO RAPID TAPE


DUNLOP PRO RAPID TAPE is a self-adhesive sealing tape that provides a waterproofing seal between the surface joints of the floor and wall, under shower grates and outlets in wet areas such as bathrooms, kitchens and laundries. Use in conjunction with DUNLOP PRO RAPID WATERPROOFING MEMBRANE for a rapid total waterproofing system and tiling can commence in 4 hours. Using this tape in conjunction with the DUNLOP PRO RAPID WATERPROOFING MEMBRANE meets the standard for waterproofing according to the Australian Building standards..

COVERAGE

Up to 15m. A standard shower recess of 1.8m height will require approximately 7m of tape. OVerlapping of tape to be a minimum of 15mm.

Si	ze	Barcode	Item Code
80 15)mm x m	9315021023930	38594



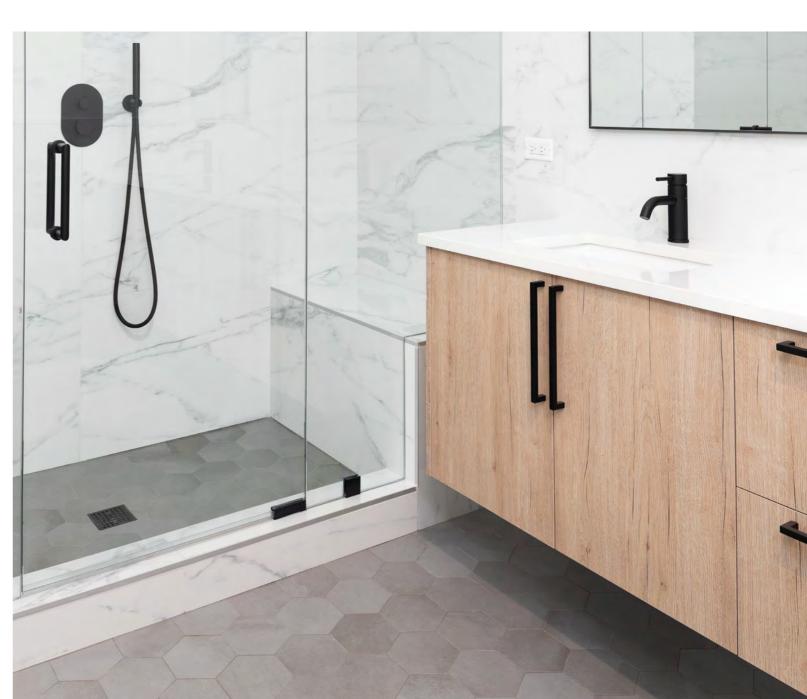

DUNLOP PRO RAPID WATERPROOFING System consists of a water-based polyurethane-acrylic hybrid waterproofing membrane and PRO RAPID TAPE for undertile waterproofing, so tiling can begin in 4 hours. With crack isolation protection, it provides flexible coverage over plastic shrinkage, hairline and other non-structural cracks.

SUBSTRATES

PRO RAPID WATERPROOFING

Internal Fibre-cement wall sheet, compressed fibre-cement sheet, wet area grade plasterboard, concrete (cured for min. 28 days), internal structural plywood (PAA branded) including marine or wet area grade only (the shower area must be sheeted using ceramic tile underlay), renders and screeds (cured for min. 7 days) and internal AAC blocks and panels

LOCATION

Indoor, outdoor, wet areas, balconies COVERAGE A 20kg unit (15 Litres) will cover approximately 17.5m²

Size	Barcode	Item Code
4kg	9315021121384	38592
20kg	9315021023923	40771



WALL TILE ADHESIVE

DUNLOP WALL TILE ADHESIVE is a ready mixed ceramic tile adhesive with superior flexibility and high grab to support even the heaviest of wall tiles.

COVERAGE

6mm

Size

750g

Trowel Size Coverage

Barcode

5.5kg 9315021021110

15kg 9315021023848

9315021021103

0.5m²/kg

Item Code

10376

10375

38314

TILE TYPES

Ceramic wall tiles, granite, marble (excluding moisture sensitive stone)

SUBSTRATES

Cement render, fibre-cement sheets, plasterboard, painted surfaces (adequately prepared)

LOCATION Indoo

COLOUR

White

SURFACES

Walls

PREMIXED RESAFLEX

DUNLOP PREMIXED RESAFLEX is a ready-to-use, flexible and tough ceramic tile adhesive. It is suitable for indoor wall and fibre-cement sheet floor situations.

TILE TYPES

Ceramic tiles SUBSTRATES Walls: Render, concrete, fibre-cement sheets, plasterboard, painted surfaces (adequately prepared). Floors: Fibre-cement sheets only LOCATION Indoor COLOUR Grey SURFACES

Walls and fibre-cement sheet floors

COVERAGE

Trowel Size Coverage 0.5m²/kg 6mm 10mn 0.3m²/kg

Size	Barcode	Item code
1kg	9315021021189	10345
4kg	9315021021196	10346
15kg	9315021023893	38317

CLASSIFICATION

D1T



TILE TYPES moisture sensitive stone)

SUBSTRATES

LOCATION Indoor and outdoor COLOUR Grey

TILE TYPES Ceramic tiles, fully vitrified, mosaics, porcelain, natural stone (excluding moisture sensitive stone)

SUBSTRATES adequately prepared) LOCATION Indoor and outdoor

TILE TYPES

SUBSTRATES (particleboard only)

LOCATION Indoor, outdoor, water features and swimming pools

COLOUR White

```
DUNLOP
```

PREMIXED **MASTIC ADHESIVE**

DUNLOP PREMIXED MASTIC TILE ADHESIVE is a premium ready-to-use indoor wall tile adhesive with superior flexibility and tenacity. Its non-slump formulation makes it ideal for all types of large wall tiles and dimensionally stable such as marble and granite.

TILE TYPES Ceramic wall tiles, granite, marble (excluding moisture sensitive stone) SUBSTRATES Cement render, plasterboard, prepared painted surfaces, fibre-cement sheet, Dunlop Waterproofing Membrane (porous tiles only) LOCATION Indoor

COLOUR

White

SURFACES Walls	
COVERAGE	
Trowel Size Coverage	
6mm	0.5m ² /kg







CUDEACEC

20kg	931502102
CLASSI	FICATION
\frown	
(D2TE)	

FLOOR TILE ADHESIVE

DUNLOP FLOOR TILE ADHESIVE is a general purpose ceramic tile adhesive for fixing all types of floor tiles both inside and out.

Ceramic tiles, fully vitrified, mosaics, porcelain, natural stone (excluding

Concrete, compressed fibre-cement sheets, cement screeds

SURFACES Floors COVERAGE Trowel Size Coverage

6mm	0.5m²/kg	
10mm	0.4m²/kg	

Size	Barcode	Item Code
4kg	9315021021134	10313



DUNLOP WALL & FLOOR TILE ADHESIVE is specially formulated to suit most tile types over many different surfaces including timber (indoors, prepared).

Fibre-cement sheets, plasterboard, cement render and concrete, existing vinyl tiles, DUNLOP WATERPROOFING MEMBRANES, existing ceramic tiles, metal surfaces, painted surfaces (oil based only), timber (indoor only and

COLOUR Grey SURFACES Walls and floors COVERAGE -----

Irowei Size	Coverage	
6mm	0.8m²/kg	
10mm	0.5m ² /kg	

Size	Barcode	Item code
2kg	9315021021158	10378
8kg	9315021021165	10379



DUNLOP TILE-ALL is a wall and floor tile adhesive which can be used to fix almost all tiles over many difficult to adhere to surfaces.

Ceramic tiles, mosaics, porcelain, fully vitrified and natural stone (excluding moisture sensitive stone)

Existing tiles, glazed ceramic tiles, metal, roughened fibreglass, prepared timber

SURFACES Walls and floors COVERAGE Trouval Siza Coverage

frower Size	Coverage
6mm	0.4m²/kg
10mm	0.25m²/kg

Size	Barcode	Item Code
2kg Kit	9315021021967	10362



TILE-ALL PLUS

DUNLOP TILE-ALL Plus is an all-purpose, highly flexible adhesive and sealant with high initial tack and excellent final bond strength. Suitable for a wide range of repairs from fitting accessories to replacing tiles – even in underwater situations!

SUBSTRATES


Concrete, timber, plywood, fibre-cement sheet, plasterboard, wood, glazed and unglazed ceramic tiles, aluminium, plastics, metal, glass, fibreglass, polystyrene foam

LOCATION

COLOUR White

SURFACES

Walls, floors, vertical/horizontal joints and junctions



* Suitable as an adhesive for small repairs underwater. Not recommended as a sealant for underwater repairs.



FLOORFIX TILE ADHESIVE

DUNLOP FLOORFIX is an economical, cement-based floor tile adhesive for the fixing of ceramic tiles.

TILE TYPES quarry tiles SUBSTRATES Concrete, render, screed LOCATION COLOUR Off White

1 Sh PETRATE TILE & GROUT **GROUT SHIELD**

READY-TO-GO TILE & GROUT

Dunlop Ready-to-Go TILE & GROUT containing Grout Shield antifungal is an easy to use 2-in-1 tile adhesive and grout ideal for mosaics and repairs. The adhesive and grout can be used indoors and outdoors for wall tiles and mosaics.

TILE TYPES Wall tiles and mosaics including ceramic, porcelain, marble (excluding moisture sensitive stone) SURFACES Walls and floors LOCATION


Indoor and outdoor

COLOUR

White

JOINT WIDTH 1–5mm			
Size	Barcode	Item Code	

Size	Barcode	Item Code
250g	9315021022254	13388





TILE TYPES tiles

SUBSTRATES and plasterboard LOCATION Indoor and outdoor COLOUR Off White

DUNLOP MULTIPURPOSE MASTIC ADHESIVE is a cementitious, non-slump tile adhesive for walls and floors in indoor and outdoor situations. It combines the properties of a mastic adhesive with those of a cement-based adhesive.

SUBSTRATES

MEMBRANES LOCATION Indoor and outdoor

COLOUR White







Indoor, outdoor and underwater repairs*

Ceramic tiles, slate, terracotta,

Indoor and covered outdoor

SURFACES Floors COVERAGE Trowel Size Coverage

HOWEI 312	e coverage	
6mm	0.3m²/kg	_
10mm	0.25m²/kg	_
Size	Barcode	Item Code
15ka	9315021021226	10314

SUPER TILESET PLUS

DUNLOP SUPER TILESET PLUS is a polymer fortified cement-based wall and floor tile adhesive. Especially designed to fix all types of ceramic tiles over stable internal and some external substrates. DUNLOP SUPER TILESET PLUS exceeds the requirements of Australian Standard AS 4992.2(C1).

SURFACES

Ceramic, porcelain, natural stone (excluding moisture sensitive stone), mosaics, fully vitrified and translucent

Concrete, render, screeds, Dunlop Waterproofing Membranes, FC sheets

Walls and floors					
COVERAGE					
Trowel S	ize Cove	rage			
6mm	9m ²				
10mm	6m ²				
Size	Barcode	Item Code			
20kg	9315021023824	38313			
CLASS	IFICATION				



MULTIPURPOSE MASTIC ADHESIVE

TILE TYPES

Ceramic, porcelain, non-moisture sensitive natural stone, fully vitrified, mosaics, translucent tiles

Concrete, cement render, existing ceramic tiles, fibre-cement sheet (walls), compressed fibre-cement sheet (floors), plasterboard, DUNLOP WATERPROOFING

SURFACES Walls and floors COVERAGE

Trowel Size Coverage

6mm 0.4m²/kg 0.3m²/kc

	0.5117/kg	
Size	Barcode	Item Code
5kg	9315021022681	22004
20kg	9315021022490	12875

CLASSIFICATION











MASTIC TILE ADHESIVE

DUNLOP TILER'S MASTIC is a high strength, flexible non-slump tile adhesive ideal for large format tiles for use on walls and floors.

TILE TYPES COVERAGE Ceramic, porcelain, non-moisture sensitive natural stone, fully vitrified, mosaics, translucent tiles SUBSTRATES Cement render, compressed fibrecement sheet (floors), concrete, DUNLOP WATERPROOFING MEMBRANES, existing ceramic tiles, ceramic tile underlay, fibrecement sheet (walls), plasterboard LOCATION Indoor and outdoor COLOUR White SURFACES







CLASSIFICATION



TILE TYPES Ceramic tiles, fully vitrified, mosaics, porcelain, natural stone (excluding moisture sensitive stone) SUBSTRATES Render, plasterboard, concrete floors, fibre-cement sheet walls, compressed

LOCATION Indoor and outdoor COLOUR Grev

DUNLOP UNIVERSAL TILE ADHESIVE is a high performance wall and floor tile adhesive suitable for most tiling applications. The adhesive is great to work with and is flexible and non-slump making it ideal for use over many surfaces as well as most tile types including large format tiles.

TILE TYPES

vitrified tiles SUBSTRATES Concrete, render, screeds, fibre-cement sheet, plasterboard walls, compressed fibre-cement sheet floors, DUNLOP WATERPROOFING MEMBRANES, existing ceramic tiles (indoors, dry areas) and ceramic tile underlay over timber

LOCATION COLOUR

TILER'S RUBBER MODIFIED

DUNLOP TILER'S RUBBER MODIFIED is a flexible rubber modified tile adhesive designed for walls and floors. Suitable for use over render, screeds, plasterboard, fibre-cement sheet walls, compressed fibre-cement sheet floors, concrete, ceramic tile underlay and DUNLOP WATERPROOFING MEMBRANES.

SURFACES

TILE TYPES Ceramic, porcelain, natural stone (excluding moisture sensitive stone), mosaics and fully vitrified

SUBSTRATES Compressed fibre-cement sheet floors. concrete floors, ceramic tile underlay, fibre-cement sheet walls plasterboard

render and DUNLOP WATERPROOFING MEMBRANES LOCATION

Indoor and outdoor COLOUR Grey

Walls and floors



TRADE RESAFLEX RAPIDSET

DUNLOP TRADE RESAFLEX RAPIDSET is a high quality, fast setting rubber modified adhesive that is ready for grouting in just 3 hours. It is suitable for ceramic wall and floor tiles in indoor and outdoor situations over a variety of substrates.

TILE TYPES

Grey

Ceramic, porcelain, non-moisture sensitive stone, fully vitrified, mosaics SUBSTRATES

Concrete, render, screeds, existing ceramic tiles, plasterboard, fibre-cement sheet walls, compressed fibre cement sheet floors and painted surfaces (oil-based)

LOCATION Indoor and outdoor COLOUR



SURFACES Walls and floors


COVER	RAGE			
Trowel S	ize Covera	age		
6mm	0.6m²/	kg		
10mm	0.4m²/	kg		
Size	Barcode	Item Co		
5kg	9315021121421	41071		
451	0045004000004	40240		

CLASSIFICATION

ode 15kg 9315021022094 10349

C1FES1



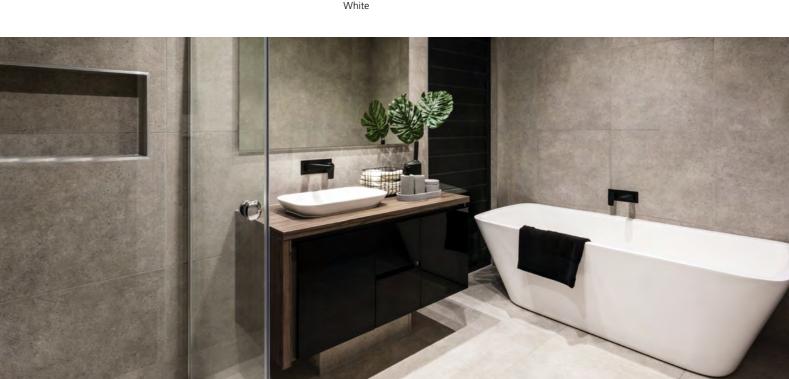





DUNLOP TRADE RESAFLEX is an economical rubber modified adhesive for fixing ceramic tiles in indoor and outdoor situations.

fibre-cement sheet floors and DUNLOP WATERPROOFING MEMBRANES

SURFACES Walls and floors COVERAGE

Trowel Size Coverage

ōmm	0.65m²/kg
10mm	0.4²/kg

Size	Barcode	Item Code
5kg	9315021022704	22005
20kg	9315021022469	16552

CLASSIFICATION



UNIVERSAL TILE ADHESIVE

Ceramic, porcelain, natural stone (excluding moisture sensitive stone), mosaics and fully

Indoor, outdoor and swimming pools

SURFACES Walls and floors COVERAGE

0.55m²/kg
0.35m²/kg

Size	Barcode	Item code
20kg	9315021022698	22056

CLASSIFICATION



WALL & FLOOR TILING ADHESIVE SELECTOR

	Indoor	Outdoor	Concrete/Screed/ Render	Plasterboard/ FC Sheet (walls)	Compressed FC Sheet (floors)	FC Sheet (over sheet timber floors)	Existing tiles (removed glaze)	Wet Areas (over waterproofing)	Metal (prime with a metal primer)	Existing tiles (USE BOND COAT)	Vinyl (suitably prepared)	Sheet Timber (suitably prepared)	Suitable for submerged applications
TILE-ALL													
WALL & FLOOR TILE ADHESIVE													
UNIVERSAL TILE ADHESIVE													
WALL TILE ADHESIVE													
MULTIPURPOSE MASTIC													
TILERS MASTIC													
RUBBER MODIFIED													
TRADE RESAFLEX													
TRADE RESAFLEX RAPIDSET													
SUPER TILESET PLUS													
PREMIXED MASTIC													
PREMIXED RESAFLEX													
FLOOR TILE ADHESIVE													
FLOORFIX TILE ADHESIVE													

TILE ADHESIVE CLASSIFICATION

Tile adhesives are classified according to certain performance criteria set by the international standard 13007. The below are the parameters which tile adhesives are tested against.

Tile Adhesives are classified into three main types:

- C Cementitious adhesive
- D Dispersion adhesive
- R Reaction adhesive

Each classification above can have additional performance characteristics such as:

- 1 Normal adhesive (standard strength tile adhesive)
- 2 Improved adhesive (stronger tile adhesive)

- F Fast setting/drying adhesive (with minimum tensile strength of 0.5MPa within 6 hours)
- T Slip resistant adhesive E – Adhesive with extended open time (once spread, the adhesive
- can be left without a tile being fixed for a longer time) S – Special deformable characteristic, for cementitious adhesives only (degree of flexibility of the adhesive, either S1 - flexible
 - or S2 highly flexible)



VINYL ADHESIVE

SUBSTRATES Concrete, timber SURFACES Floors LOCATION Indoors



SUBSTRATES vinyl flooring SURFACES Floors LOCATION Indoors

DUNLOP CARPET & CO ADHESIVE

DUNLOP VINYL ADHESIVE is a water based high strength, easy to spread adhesive for sticking vinyl sheet and vinyl tiles to most concrete and timber surfaces.

COVERAGE

Approximately 5m² per litre

Size	Barcode	Item Code		
1L	9315021021011	10369		
4L	9315021021028	10370		

CARPET TILE ADHESIVE

DUNLOP CARPET TILE ADHESIVE is a water based, pressure sensitive adhesive suitable for vinyl-backed carpet tiles, VCT (Vinyl Composite Tile) and underlay installations.

Hardboard, concrete, timber and existing

COVERAGE ۸. natoly 16m² por litro

Approximately form per intre			
Size	Barcode	Item Code	
2L	9315021022360	16193	



DUNLOP CARPET & CORK ADHESIVE is a water-based, high strength adhesive that is suitable for use over a range of surfaces such as concrete, marine ply and fibre-cement sheet.

SUBSTRATES			
Concrete, marine ply			
and fibre-cement sheet			
SURFACES			

LOCATION

Floors

Indoors

COVERAGE Approximately 3.5m² per litre

Size	Barcode	Item Code		
1L	9315021022414	13593		



ARTIFICIAL GRASS ADHESIVE

DUNLOP ARTIFICIAL GRASS ADHESIVE is a high strength, all weather adhesive suitable for laying artificial grass, outdoor carpet and marine carpet for both indoor and outdoor projects.

COVERAGE

SUBSTRATES Concrete, timber, clean paved surfaces, suitable and prepared metal surfaces and sanded fibreglass

SURFACES Floors LOCATION Indoor and outdoor Approximately 3m² per litre Size Barcode Item Code 9315021021059 10301 1L 9315021021066 10300



SUBSTRAT Timber, viny SURFACES Floors LOCATION Indoors



READY-TO-GO VINYL ADHESIVE

DUNLOP Ready-to-Go Vinyl Adhesive is a revolutionary spray-on adhesive, suitable for applying vinyl sheet and vinyl tile to a variety of substrates. The newly laid area is trafficable immediately.

SUBSTRATES

Concrete, underlayment grade plywood, metal (steel and aluminium) and fibreglass SURFACES Floors LOCATION Indoors

COVERAGE Approximately 15m ² per 454g			
	Size	Item Code	
	454g	9315021022230	12954

GRIPPER FAST

DUNLOP GRIPPER FAST ADHESIVE is ideal for bonding carpet gripper, woods, metal trims, metal nosing, aluminium and many other types of products where a quick bond is required to concrete, timber and most other common building substrates. DUNLOP GRIPPER FAST has excellent resistance to high temperatures and water. Rapid setting within 1 hour from application.

SUBSTRATES

Concrete, timber, metal and aluminium SURFACES Floors LOCATION Indoors COLOUR White

COVERAGE	
6mm per 0.5m ² /kg	

Size	Barcode	Item Code	
500ml	9315021121407	41252	



REVIVE & SHINE

DUNLOP REVIVE & SHINE is a neutral, multipurpose cleaner and maintainer that enhances the appearance of sealed floors. DUNLOP REVIVE & SHINE reduces the appearance of scuffing, increases durability and improves gloss levels.

TES	
yl and laminate flooring	
5	

Size	Barcode	Item Code	
500ml	9315021022629	19882	



ULTRA-WHITE GROUT

DUNLOP ULTRA-WHITE GROUT is a non-sanded, supersmooth flexible grout for ceramic wall and floor tiles. It offers a smooth finish and can be used in the joints between 1mm and 4mm. This grout is water repellent, resists dirt pick up and is easy to clean.

COVERAGE PER KG

TILE TYPES Ceramic, porcelain, marble, granite and mosaics SURFACES Walls and floors LOCATION Indoor and outdoor JOINT WIDTH 1–4mm

Tile Size	J	Joint Width			
L x W x Depth	1.5mm	3mm	4mm		
50 x 50 x 5mm	1.5m ²	0.7m ²	0.5m ²		
100 x 100 x 5mm	3.0m ²	1.5m ²	1.1m ²		
150 x 150 x 5mm	4.5m ²	2.2m ²	1.7m ²		
300 x 300 x 5mm	8.9m ²	4.5m ²	3.3m ²		
600 x 300 x 9mm	7m ²				
600 x 600 x 9mm	9m ²				

Colour	Size	Barcode	Item Code	
Ultrawhite	1.5kg	9315021021417	10373	
Ultrawhite	5kg	9315021021493	10372	





TILE TYPES Ceramic, porcelain, marble, granite and mosaics SURFACES Walls and floors LOCATION Indoors and outdoors (In swimming pools, use White 200 mixed with Dunlop Primer & Additive) JOINT WIDTH

1–8mm coverage per kg COVERAGE

Tile Size	Joint Width				
L x W x Depth	1.5mm	3mm	5mm	8mm	
25 x 25 x 4mm	1.10/m ²	2.20/m ²	3.70/m ²	5.90/m ²	
100 x 100 x 8mm	0.55/m ²	1.10/m ²	1.85/m ²	2.95/m ²	
200 x 200 x 8mm	0.30/m ²	0.55/m ²	0.90/m ²	1.45/m ²	
330 x 330 x 9mm	0.20/m ²	0.40/m ²	0.60/m ²	1.00/m ²	
600 x 300 x 9mm	8.0/m ²				
600 x 600 x 9mm	10.0/m ²				

*NOTE: All coverage tables show approximate coverage in kilograms per square metre. A 15% wastage allowance has been included due to varying application techniques, tile types and job site variations.

NOTE: Colours on this page are indicative and limited by the print process.

FLEXIBLE COLOURED GROUT

DUNLOP COLOURED GROUT is a flexible grout for most wall and floor tiles. It is easy to work with and is available in a range of popular colours. DUNLOP COLOURED GROUT contains Grout Shield which is a powerful mould inhibitor that will resist the growth of mould and bacteria to keep surfaces looking better for longer.

Colour	Size	Barcode	Item Code
White 200	1.5kg	9315021021349	10338
White 200	5kg	9315021021424	10340
Alabaster 282	1.5kg	9315021022315	13409
Buff 229	1.5kg	9315021021356	10318
Travertine 277	1.5kg	9315021021363	10336
Indvertine 277	5kg	9315021021448	10337
Havana 280	1.5kg	9315021021844	10325
	1.5kg	9315021021370	10328
Misty Grey 241	5kg	9315021021455	10329
	15kg	9315021021981	10327
Magellan Grey 273	1.5kg	9315021023862	38787
Wagehan Grey 275	5kg	9315021023879	38785
	1.5kg	9315021021387	10335
Slate Grey 211	5kg	9315021021462	10334
	15kg	9315021021547	10333
Charred Ash 287	1.5kg	9315021021394	10321
	5kg	9315021021479	10322
Midnight 202	1.5kg	9315021021400	10330
	5kg	9315021021486	10332





EPOXY GROUT

TILE TYPES SURFACES Walls and floors LOCATION

Indoor and outdoor JOINT WIDTH 1.5–15mm COVERAGE

The table shows approximate coverage per kit. Allow an extra 10-15% for wastage due to application technique, tile types and job site variations

TILE TYPES SURFACES Walls and floors

LOCATION Indoor and outdoor

JOINT WIDTH Suitable for joints between 1mm and 5mm

COVERAGE

The table on the right shows approximate coverage per 800g bottle. Allow an extra 10-15% for wastage due to application technique, tile types and job site variations.

DUNLOP GROUT PAINT is the ideal way to revive a tiled area without removing old or discoloured grout. Suitable over most grout joints, DUNLOP GROUT PAINT can be used both indoors on walls and floors* and outdoors on walls.

SURFACES Walls and floors LOCATION Indoor and outdoor COVERAGE on joint width and tile size. Refer to product packaging

DUNLOP EASY CLEAN EPOXY GROUT is a high performance, durable grout which has superior stain resistance and is able to resist most household chemicals. Suitable for areas subjected to high wear including areas where strict hygiene standards are required such as kitchens as well as wet areas such as bathrooms and swimming pools. It is easy to use and clean during application and also easy to maintain.

Ceramic, porcelain and non-moisture sensitive natural stone tiles

COVERAGE PER KIT

Tile Size	Joint Width				
L x W x Depth	1.5mm	3mm	5mm		
25 x 25 x 4mm	4m ²	2m ²	1.3m ²		
100 x 100 x 8mm	8m ²	4m ²	2.5m ²		
200 x 200 x 8mm	17m ²	8m ²	5m ²		
600 x 600 x 10mm	40m ²	40m ²	12m ²		
KIT is Part A 500ml, Part B, 250ml & Part C 2.5kg					

Colour	Barcode	Item Code
White	9315021023152	24163
Slate Grey	9315021023176	24165

READY-TO-GO COLOURED GROUT

DUNLOP Ready-to-Go COLOURED GROUT is a ready-mixed, easy to apply grout that is suitable for walls and floors in indoor and outdoor situations. Suitable to rejuvenate old grout on walls and floors.

Ceramic, porcelain, marble, granite and mosaics (excluding moisture sensitive stone)

COVERAGE PER KG

Tile Size	Joint Width				
L x W x Depth	1.5n	nm	3mm	5mm	
25 x 25 x 4mm	1.04m ²		0.52m ²	0.31m ²	
100 x 100 x 8mm	2.08	m ²	1.04m ²	0.63m ²	
200 x 200 x 8mm	4.17	m2	2.08m ²	1.25m ²	
Colour	Size	Bar	code	Item Code	
Ultrawhite	800g	931	5021023442	25333	
Ultrawhite	1.5kg	9315021023916		38758	
White 400	800g	9315021022124		11255	
Charred Ash	800g	9315021023800		38756	
Misty Grey 441	800g	9315021022209		12864	
Magellan Grey 273	800g	931	5021023909	38757	
Slate Grey 411	800g	931	5021022148	11258	
Jet Black 403	800g	931	5021022131	11257	
Travertine 477	800g	931	5021022216	12865	
Buff 429	800g	931	5021022155	11259	

GROUT PAINT

Colour	Size	Barcode	Item Code
Ultrawhite	250ml	9315021022889	22398
Slate Grey	250ml	9315021022926	22413
Jet Black	250ml	9315021022933	22414

Coverage will vary depending *Grout Paint may wear faster in regular traffic areas (floors) or frequent exposure to water & chemicals (showers)



WIDE JOINT GROUT

DUNLOP WIDE JOINT GROUT is a cement-based tile grout that is designed for use in wide joints between 5mm and 50mm. It is suitable for both indoor and outdoor grouting of ceramic tiles, terrazzo, terracotta*, slate* and guarry tiles. *Porous tiles: seal before grouting.

COVERAGE PER KG

THE TYPES Ceramic tiles, terrazzo, terracotta, slate and quarry tiles

SURFACES Walls and floors LOCATION Indoor and outdoor JOINT WIDTH 5-50mm

Tile Size	Joint Width		
L x W x Depth	8mm	15mm	20mm
200 x 200 x 10mm	9m ²	5m ²	4m ²
400 x 400 x 10mm	19m ²	10m ²	8m ²
600 x 600 x 10mm	28m ²	15m ²	11m ²

The table below shows approximate coverage

for 15kg of DUNI OD WIDE JOINT CROUT

Colour	Size	Barcode	Item Code
Mid Grey	15kg	422789315021121070	503

COLOURED SILICONE

DUNLOP COLOURED SILICONE is a flexible acetic sealant for use in joints such as wall and floor joints, tiled surface and bench tops, bath edges, cupboards, splashbacks and movement joints.

SURFACES	Colour	Size	Barcode	Item Code
Walls and floors	Ultrawhite	310ml	9315021021585	24380
LOCATION Indoor and outdoor	Alabaster	310ml	9315021022346	24381
JOINT WIDTH	Buff	310ml	9315021021592	24374
Max width 30mm, depth 15mm	Travertine	310ml	9315021021608	24379
SUITABILITY	Havana	310ml	9315021021950	24375
Good adhesion	Misty Grey	310ml	9315021021615	24377
to ceramic tiles, glass, enamel,	Magellan Grey	310ml	9315021023855	38788
anodized aluminium,	Slate Grey	310ml	9315021021622	24378
granite, porcelain and sanitary acrylics.	Charred Ash	310ml	9315021021639	24373
, , ,	Midnight	310ml	9315021021646	24376



MATTE SILICONE

DUNLOP TRADE MATTE SILICONE is an acetic cure flexible sealant for use in joints such as wall and floor joints, tiled surface and bench tops, bath edges, cupboards, splashbacks and movement joints up to 30mm. It has great adhesion with ceramic tiles, glass, enamel, aluminium, granite, porcelain and sanitary acrylics. Suitable for indoor and outdoor use, DUNLOP TRADE MATTE SILICONE is waterproof and is suitable for use in a shower recess.

SURFACES	Colour	Size	Barcode	Item Code
wall and floor joints, tiled surface and bench	Anthracite	310ml	9315021121872	45144
tops, bath edges,	Grey	310ml	9315021121858	45143
cupboards, splashbacks and movement joints	Silver Grey	310ml	9315021121896	45145
LOCATION	White	310ml	9315021121902	45146
Indoor and outdoor				

JOINT WIDTH Max width 30mm, depth 15mm

	A Designation
2/14 M	





DUNLOP NATURAL LOOK SEALER is a water based, penetrating sealer. It maintains the natural appearance of the surface whilst offering superior stain resistance of both oil and water based stains making sealed areas easier to clean. Suitable for indoor and outdoor use with excellent UV resistance, it is suitable over a wide range of surfaces.

SURFACES Brick, stone, slate, masonry, pavers, porous tiles, concrete and cement based grouts. LOCATION Indoor and outdoor



DUNLOP TILE AND GROUT Concentrated Cleaner is an effective and easy to use everyday neutral cleaner that will remove general household dirt, grime and oils on tiles and grout.

SURFACES APPLICATION





TIMBER JOINT SEALANT

DUNLOP TRADE TIMBER SEALANT is an acrylic sealant for use in joints such as wall and floor joints, for laminate, parquet and wooden floorboards. It has great adhesion and can be sanded and painted over to complete finishing. Suitable for indoor use this solvent-free formula is the ideal solution for sealing all movement joints up to 30mm.

SII	RFA	CES
	111 /	CLD

Laminate, parquet and wooden floorboards LOCATION

	Colour	Size	Barcode	Item Code
d	Beech	310ml	9315021121926	45150
	Grey Oak	310ml	9315021121957	45148

Indoor and outdoor

JOINT WIDTH

Max width 30mm, depth 15mm



DUNLOP GROUT SEALER is a water based protective sealer which penetrates and cures within the pores of the grout. The sealer is fast drying and the bottle contains a brush for easy application.

Seals up to 25m² per 250ml

Size	Barcode	Item Code
250ml	9315021021943	10317

NATURAL LOOK SEALER

COVERAGE Seal up to 20m² per litre

Size	Barcode	Item Code
1L	9315021022506	16779
4L	9315021022513	16780

TILE & GROUT CONCENTRATED CLEANER

Surface Tiles and Dunlop Grout

Wipe on: Dilute 10mL per 1L of water or Spray on: Diluting 6mL per 1L of water

Size	Barcode	Item Code
1L	9315021022957	22504



DUNLO

GENERAL

- 0=

URPOSE

ARDIT **CONSTRUCTION GROUT**

A high strength construction grout that can be mixed to a pastelike or flowable mix, suitable for a wide range of projects. The DUNLOP CONSTRUCTION GROUT is formulated with an extended working time which allows more time for positioning. Suitable for indoor and outdoor use, this multipurpose non-shrink grout achieves approximately 45MPa in 7 days and 65MPa in 28 days.

LOCATION Indoor and outdoor YIELD/COVERAGE 11.2L per 20kg, non-slump mix

12.0L per 20kg, flowable mix WORKABILITY

Mix to a non-slump paste or flowable consistency

COMPRESSIVE STRENGTH
15MPa (after 7 days)
55MPa (after 28 days)
APPLICATION THICKNESS 5-100mm

Size	Barcode	Item Code
5kg	9315021121834	45076
20kg	9315021022193	10305

GENERAL PURPOSE CONSTRUCTION GROUT

An economical, high-strength construction grout that can be mixed to a non-slump or pourable mix and is suitable for a wide range of projects and applications. The cement-based formulation contains additives that provide positive expansion when the grout is in its plastic state (Class A type) and is also shrinkage compensated when in the hardened state.

LOCATION

Indoor and outdoor YIELD/COVERAGE 9.5L per 20kg, dry pack mix 10.3L per 20kg, plastic state

10.9L per 20kg, flowable mix WORKABILITY

Mix to a dry mix or flowable consistency

COMPRESSIVE STRENGTH 70MPa (after 7 days) 85MPa (after 28 days) **APPLICATION THICKNESS** 10-100mm

Size Barcode Item Code 20kg 9315021023640 32288

DUNLO TILE POINTING

SURFACES Hip and ridge roof tiles LOCATION Outdoors COVERAGE Depending on application technique, 10L of DUNLOP TILE POINTING will cover approximately 20-22 lineal metres of ridging

DUNLOP ROOF, GUTTER & POND Repair is a highly flexible, silane modified adhesive and sealant. It is suitable for minor repairs, even those that need to be carried out underwater or whilst raining. DUNLOP ROOF, GUTTER & POND Repair is grey in colour, can be painted over and is suitable for a wide range of applications to seal and repair joints and cracks.

SUBSTRATES

and glazed tiles LOCATION Indoor, outdoor and immersed conditions

LOCATION Indoor and outdoor SUBSTRATES



TILE POINTING

DUNLOP TILE POINTING is a flexible adhesive mechanical fastener for hip and ridge tiles, surpassing relevant Australian standards. DUNLOP TILE POINTING achieves C4 Classification for approved use in cyclonic regions (independently tested).

Colour	Size	Barcode	Item Code
Slate Grey	10L	9315021022995	22973
Charred Ash	10L	9315021022988	22972
Jet Black	10L	9315021022971	22971
Sand	10L	9315021023008	22974
Terracotta	10L	9315021023015	22975

ROOF, GUTTER & POND REPAIR

Concrete, wall panels, waterproofing membranes, ceramic tiles, aluminium, plastic, metal, polystyrene foam, glass

SUK	ACI	ES .
Walls	and	floor

Size	Barcode	Item Code
310ml	9315021114454	11036

FLEXIBLE FC JOINTING COMPOUND

Is suitable for jointing fibre cement sheet and blueboard prior to coating with a decorative finish. This flexible premixed compound has excellent adhesion and is easy to use. Use DUNLOP COLOURED RENDER TEXTURE COAT as a decorative finish over fibre cement sheet or blueboard.

Fibre cement sheet and blueboard

COVERAGE

7Lm at 75mm width at 1mm thickness

Size	Barcode	Item Code
300ml	9315021023770	37072
3kg	9315021023732	32476
8kg	9315021023749	32477




RENDER JOINT & PATCH

DUNLOP RENDER JOINT & PATCH compound is a two-in-one formulation suitable for jointing fibre-cement sheet and blueboard prior to rendering as well as patching cracks and holes of existing render to a depth or width of up to 5mm.

SUBSTRATES

When used as jointing compound, suitable for use over blueboard or fibre-cement sheet. As a patching compound, suitable for use over existing render surfaces. LOCATION Indoor and outdoor







SUBSTRATES LOCATION Indoor and outdoor

THICKNESS 2–10mm



SUBSTRATES fibre cement sheet





DUNLOP AAC CONCRETE BLOCK ADHESIVE is an off-white cement based adhesive which has been specially formulated for bonding lightweight AAC concrete blocks.

SUBSTRATES LOCATION Indoor and outdoor



READY-TO-GO RENDER

Ready-to-Go Render has been premixed to an optimal consistency. Suitable for indoor and outdoor projects over a wide variety of surfaces including brickwork, AAC blocks, FC sheet and concrete. The easy trowel, easy float formulation of Dunlop renders makes it perfect for the DIYers and trade alike.

SUBSTRATES

Brickwork, painted surfaces, blue board, concrete walls, AAC panels and blocks LOCATION Indoor and outdoor

COVERAGE

16kg of Ready-to-Go Render will cover approximately 6m² at 1mm or 2m² at 3mm thickness



THICKNESS

1–5mm



ACRYLIC RENDER

A multipurpose, acrylic render suitable for indoor and outdoor projects over a wide variety of surfaces including brickwork, AAC blocks and concrete. The unique formulation is creamy, boasts superior trowelability and can be applied up to 10mm with no sagging or cracking.

SUBSTRATES Brickwork, concrete blockwork, concrete


walls, AAC panels and blocks LOCATION Indoor and outdoo THICKNESS 2–10mm

COVERAGE 20kg of Acrylic Render will cover

approximately 6.5m² at 2mm thickness or 2.6m² at 5mm thickness

Size	Barcode	Item Code
20kg	9315021022261	13372







27

FLEXIBLE FINE COAT RENDER

DUNLOP FINE COAT RENDER is a fibre-reinforced polymer modified render that provides superior adhesion and flexibility and is suitable over a variety of substrates. The render can be applied using standard trowelling methods or by spray and finished using a wooden or plastic float for a dense and smooth finish or a sponge for coarse and sandy finish.

Brickwork, FC sheet/blueboard, concrete and blockwork, painted surfaces, existing render AAC (autoclaved aerated concrete) panels and blocks, EPS (Expanded and extruded polystyrene walling systems)

COVERAGE

20kg of Fine Coat Render will cover approximately 6.5m² at 2mm thickness. 2.6m² at 5mm thickness and 1.3m² at 10mm thickness

Size	Barcode	Item Code
20kg	9315021022278	13373

COLOURED RENDER TEXTURE COAT

DUNLOP COLOURED RENDER TEXTURE COAT is a durable acrylic protective texture coating providing a long lasting contemporary decorative finish. With the inclusion of a hydrophobic water repellent additive, the surface is low maintenance with low dirt pick up so surfaces will look better for longer.

Fully prepared brick, blockwork, concrete, blueboard or compressed LOCATION

Indoor and outdoor

COVERAGE

12.5L will cover approximately 10m² at 1mm dry film thickness.

	Size	Barcode	Item Code
ond [®] steel Surfmist	12.5L	9315021023466	30015
ond [®] steel Dune	12.5L	9315021023473	30016
ond [®] steel Woodland Grey	12.5L	9315021023497	30018
ond [®] steel Monument	12.5L	9315021023503	30019

Note: Colours on this page are indicative and limited by the print process.

AAC CONCRETE BLOCK ADHESIVE


AAC Concrete panels and blocks

COVERAGE

As a guide, 15kg of DUNLOP AAC BLOCK ADHESIVE will fix 19m² of 75mm concrete block panel (150 x 40cm)or the following coverage of concrete blocks (60 x 20cm);

• 7m² at 100mm thick AAC block • 3m² at 200mm thick AAC block

Size	Barcode	Item Code
15kg	9315021023886	38528



ARDIT TROWEL

The DUNLOP ARDIT TROWEL is the ideal floor levelling tool, made from high strength stainless steel and supported by multiple rivets in it's construction. The unique ErgoGrip handle provides a comfort whilst achieving a professional finish.

> Barcode Item Code 9315021022803 22309








GAUGING TROWEL

The DUNLOP GAUGING TROWEL is a multipurpose tool ideal for applications such as concrete, screeds, renders, masonry and roof pointing. Made from high quality carbon steel, the gauging trowel has a unique ErgoGrip handle for added comfort.








The DUNLOP PLASTIC FLOAT is a quality PVC tool for achieving a smooth render finish.



CONCRETE FLOAT

The DUNLOP CONCRETE FLOAT is a hard wearing sides-up float for a professional concrete finish. Made from high strength stainless steel, the float also features the Dunlop ErgoGrip handle.





CONCRETE EDGER

The DUNLOP CONCRETE EDGER is a quality stainless steel trade tool which is ideal for providing superior edging in concrete for a professional finish.

Barcode	Item Code
9315021022841	22313




POLY FLOAT

The DUNLOP POLY FLOAT is a quality trade tool which is ideal for providing a superior, professional finish for renders and screeds.

EXT. CORNER TOOL

The DUNLOP EXTERNAL CORNER TOOL provides a superior and professional finish for external corners when applying renders.

Barcode	Item Code
9315021022797	22308



The DUNLOP RENDERER'S HAWK is a quality trade tool for rendering. The Hawk is made from a strong, grooved aluminium plate that supports the render during application.

Barcode	Item Code	
9315021022728	22300	

RENDERERS BRUSH

The DUNLOP RENDERER'S BRUSH is a quality trade tool made from palm fibre bristles which is ideal for wetting down surfaces prior to rendering.

Barcode	Item Code
9315021022735	22302

Barcode	Item Code
9315021022759	22304

Barcode	Item Code
9315021022766	22305

SPONGE FLOAT

The DUNLOP SPONGE FLOAT for a superior render finish contains a perforated aluminium plate for water transfer through the back of the float.


Barcode	Item Code
9315021022780	22307



FINISHING TROWEL

The DUNLOP FINISHING TROWEL for rendering is made from a high strength stainless steel with a unique ErgoGrip handle. This high quality tool is ideal for providing a superior, professional finish for renders and screeds.

Barcode	Item Code
9315021022742	22303

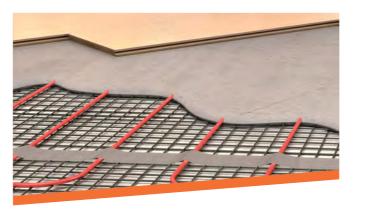



The HOTWIRE UNDERTILE HEATING SYSTEM is the ultimate in luxury heating. Warmth will be achieved in as little as 30–60 minutes. The fully programmable thermostat can simply be programmed around your lifestyle. Add the low running costs and environmental benefits such as mould reduction, and in turn less cleaning, and you have a touch of luxury at an affordable price. All this for much lower running costs than your standard heat lamp unit.

SURFACES Floors: Concrete, sheet timber, high density compressed fibre cement sheet LOCATION Indoors

Barcode	Barcode	Item Code
Hotwire 300 Watt Kit	9315021023244	24808
Hotwire 400 Watt Kit	9315021023251	24809
Hotwire 500 Watt Kit	9315021023220	24546
Hotwire 600 Watt Kit	9315021023237	24547
Hotwire 700 Watt Kit	9315021023268	24810
Hotwire 800 Watt Kit	9315021023275	24811
Hotwire 900 Watt Kit	9315021023282	24812



WOODEN FLOAT

The DUNLOP WOODEN FLOAT is made from hard wearing beechwood and is used for finishing renders, concrete and screeds. The unique ErgoGrip handle makes it comfortable to work with for a professional finish.






SCOOP

The DUNLOP SCOOP is made from high strength steel with a unique ErgoGrip handle. This high quality tool is ideal for providing a superior, professional finish for renders and plasterers.





MIXING PADDLE

The multi-use mixing paddle is perfect for mixing mortars, tile adhesives, floor levellers, render, plaster and screeds. Designed to efficiently remove dry powder from the sides and bottom of the bucket, ensuring a 100% product mix.

Barcode	Item Code
9315021121803	44585



NON-SLIP BUCKET BASE

The DUNLOP NON-SLIP BUCKET BASE is high strength rubber that provides a strong grip for the Dunlop 10L pails.





10L DUNLOP PAILS




The HOTWIRE UNDERTILE HEATING SYSTEM is the ultimate in luxury heating. Warmth will be achieved in as little as 30–60 minutes. The fully programmable thermostat can simply be programmed around your lifestyle. Add the low running costs and environmental benefits such as mould reduction, and in turn less cleaning, and you have a touch of luxury at an affordable price. All this for much lower running costs than your standard heat lamp unit. SURFACES Floors: Concrete, sheet timber, high density compressed fibre cement sheet LOCATION

Barcode Hotwire H

Indoors

300 Watts Hotwire He 375 Watts Hotwire He 450 Watts Hotwire He 525 Watts



HOTWIRE UNDER TILE HEATING

Hotwire 1000 Watt Kit	9315021023299	24813
Hotwire 1250 Watt Kit	9315021023305	24814
Hotwire 1500 Watt Kit	9315021023312	24815
Hotwire 1750 Watt Kit	9315021023329	24816
Hotwire 2000 Watt Kit	9315021023336	24817
Hotwire 2500 Watt Kit	9315021023343	24818
Hotwire 3000 Watt Kit	9315021023350	24819
Hotwire 3500 Watt Kit	9315021023367	24820
Hotwire 4000 Watt Kit	9315021023374	24821
Hotwire 5000 Watt Kit	9315021023381	24822
Hotwire 6000 Watt Kit	9315021023398	24823

HOTWIRE FLOOR HEATING MAT

	Barcode	ltem Code
eating Mat 2m ²	754590225007	43906
eating Mat 2.5m ²	754590225014	43907
eating Mat 3m²	754590225021	43908
eating Mat 3.5m ²	754590225038	43909

	1	
Hotwire Heating Mat 600 Watts 4m ²	754590225045	43910
Hotwire Heating Mat 750 Watts 5m ²	754590225052	43911
Hotwire Heating Mat 900 Watts 6m ²	754590225069	43912
Hotwire Heating Mat 1050 Watts 7m ²	754590225076	43913
Hotwire Heating Mat 1200 Watts 8m ²	754590225083	43914
Hotwire Heating Mat 1350 Watts 9m ²	754590225090	43915
Hotwire Heating Mat 1500 Watts 10m ²	754590225106	43916

NEED HELP WITH YOUR PROJECT?

The DUNLOP TRADE website makes your project easy with everything you need. Watch our How-to videos and find other helpful tools at dunloptrade.com.au

- How-to Videos
- Tile Adhesive Selector
- DIY Project Centre
- Grout Colour Selector
- Product Calculators
- Products
- Datasheets and Technical Data









Scan the QR code for the list of our social platforms



dunloptrade.com.au

